



SWD SERIES

Application

Surface Down Light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Input Voltage	200-240 V AC
Power Factor	≥ 0.9
IP Rating	IP40
Rendering Index	> 80
Beam Angle	110°
Operating Temperature	0 to 35 Degrees Celsius
LED Operating Life	30,000 Hrs
Colour Correlated Temperature	3000K, 4000K, 6000K
Dimmable	Non Dimmable
Mounting Method	Surface/Suspension Ceiling Mounted
Housing	Aluminium Housing & Mild Steel Base

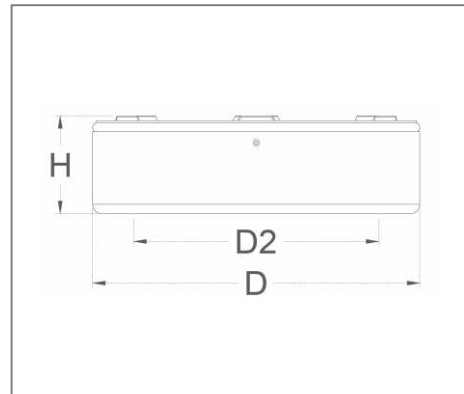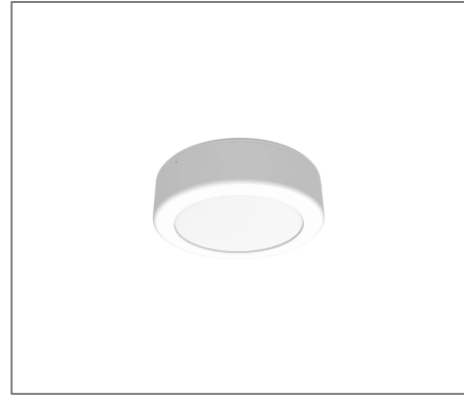

Ordering Data

Part No.	Power	Lumens	Ampere	Dimension		
				Diameter	Diameter 2	Height
EVO-SWD-6-12	12W	900lm	0.05A	164	108	62
EVO-SWD-8-18	18W	1600lm	0.08A	207	155	62
EVO-SWD-10-26	26W	2300lm	0.11A	255	191	68