


## SWDR SERIES

### Application

Surface Down Light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

### Specification

<b>Input Voltage</b>	200-240 V AC
<b>Power Factor</b>	≥ 0.9
<b>IP Rating</b>	IP40
<b>Rendering Index</b>	> 80
<b>Beam Angle</b>	110°
<b>Operating Temperature</b>	0 to 35 Degrees Celsius
<b>LED Operating Life</b>	30,000 Hrs
<b>Colour Correlated Temperature</b>	3000K, 4000K, 6000K
<b>Dimmable</b>	Non Dimmable
<b>Mounting Method</b>	Surface/Suspension Ceiling Mounted
<b>Housing</b>	Aluminium Housing & Mild Steel Base

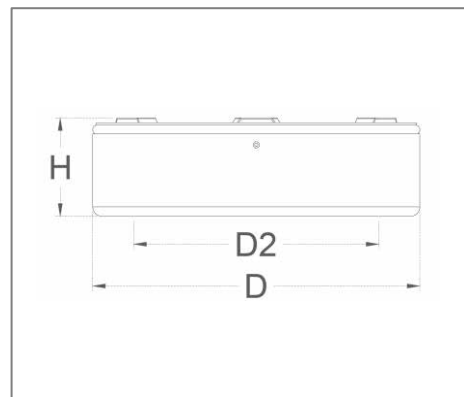

### Ordering Data

Part No.	Power	Lumens	Ampere	Dimension		
				Diameter	Diameter 2	Height
EVO-SWDR-6-12	12W	900lm	0.05A	164	108	62
EVO-SWDR-8-18	18W	1600lm	0.08A	207	155	62
EVO-SWDR-10-26	26W	2300lm	0.11A	255	191	68