



## PFS SERIES

### Application

Surface T-Bar Panel Light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

### Specification

<b>Input Voltage</b>	200-240 V AC
<b>Power Factor</b>	≥ 0.9
<b>IP Rating</b>	IP20
<b>Rendering Index</b>	> 80
<b>Beam Angle</b>	110°
<b>Operating Temperature</b>	0 to 35 Degrees Celsius
<b>LED Operating Life</b>	50,000 Hrs
<b>Colour Correlated Temperature</b>	3000K, 4000K, 6000K
<b>Dimmable</b>	Non Dimmable
<b>Mounting Method</b>	Surface T-Bar Ceiling – Metric/Imperial size
<b>Housing</b>	Mild Steel with Electrostatically Polyester Powder Coated

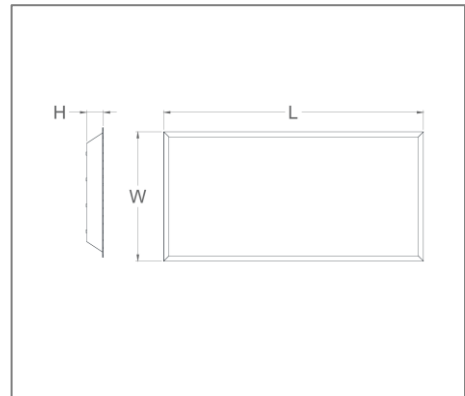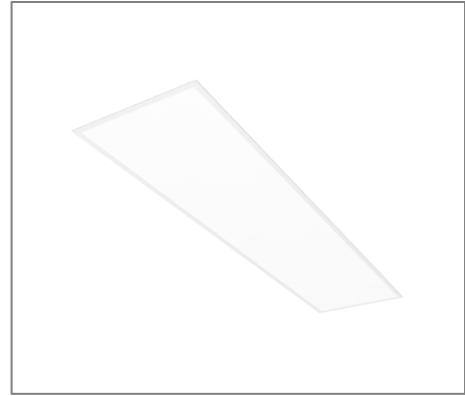

### Ordering Data

Part No.	Power	Lumens	Length (L x W x H)
EVO-PF-S-12	15W	1600lm	604mm x 313mm x 70mm
EVO-PF-S-22	30W	3200lm	604mm x 613mm x 70mm
EVO-PF-S-14	30W	3200lm	1204mm x 313mm x 70mm
EVO-PF-S-24	60W	6400lm	1204mm x 613mm x 70mm

\* Product specification subject to change according to technology improvement.