

4MLFT8-S SERIES


Application

T8 LED louver fitting (SURFACE) is designed to use for offices, libraries, convenience stores, discount stores, classroom etc.

Specification

Input Voltage	200-240 V AC
Power Factor	0.9
IP Rating	IP20
Rendering Index	> 80
LED Operating Temperature	0 to 35 Degree Celsius
LED Operating Life	50, 000 Hrs
CCT (K)	3000K, 4000K, 6500K
Dimmable	Non Dimmable
Mounting Method	Surface Ceiling Mounted
Housing	Mild Steel Fitting Electrostatically Polyester Powder Coated
Fitting Thickness	0.5mm

Ordering Data

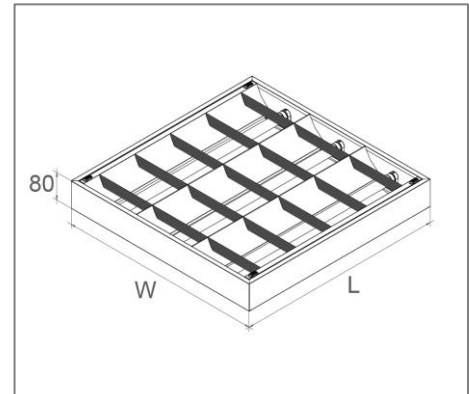

Part No.	Power	Lumens	No. of T8 LED Tube	Dimension (mm)
EVO-MLFT8-S-2414	72W	4200lm	2	1223(L) X 300(W)
EVO-MLFT8-S-2424	72W	4200lm	2	1223(L) X 604(W)
EVO-MLFT8-S-3424	108W	6300lm	3	1223(L) X 604(W)
EVO-MLFT8-S-4424	144W	8400lm	4	1223(L) X 604(W)

Related Product : Applicable with digital catalogue only
(Please click the product photo to redirect towards the respective cut-sheet)



* Product specification subject to change according to technology improvement.