

28LZ9/HZ9 SERIES (2200K – 6000K)


Application

LED Strip Light is designed with weatherproof system to use for landscaping lighting, outdoor features lighting, indirect lighting and etc.



Specification

Input Voltage	24 V DC
LED Type	2835
CRI	> 90
CCT (K)	2200K – 6000K
Dim Option	Optional
IP Rating	IP 65
Standard Length	5 m
Thickness	4.5 mm

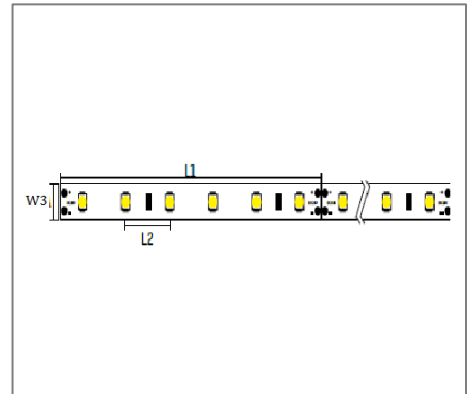

Ordering Data

Part No.	Power (W/M)	Current (mA)	Dimension (mm)	LED Qty (pcs/m)
EVO-IP65-28LZ9-60S-W08-X	4.8	20	100(L1), 16.7(L2), 10(W3)	60
EVO-IP65-28LZ9-96S-W08-X	7.8	20	62.5(L1), 10.4(L2), 10(W3)	96
EVO-IP65-28LZ9-120S-W08-X	9.6	20	50(L1), 8.3(L2), 10(W3)	120
EVO-IP65-28LZ9-180S-W10-X	14.4	20	33.3(L1), 5.6(L2), 12(W3)	180
EVO-IP65-28HZ9-30S-W08-X	8.5	60	166.7(L1), 33.3(L2), 10(W3)	30
EVO-IP65-28HZ9-60S-W08-X	10	60	100(L1), 16.7(L2), 10(W3)	60
EVO-IP65-28HZ9-60S-W10-X	14.4	60	100(L1), 16.7(L2), 12(W3)	60
EVO-IP65-28HZ9-120S-W10-X	19.2	60	50(L1), 8.3(L2), 12(W3)	120

Remark: 'X' (CCT) = "22"(2200K) / "24"(2400K) / "27"(2700K) / "30"(3000K) / "40"(4000K) / "50"(5000K) / "60"(6000K)

Related Product : Applicable with digital catalogue only
 (Please click the product photo to redirect towards the respective cut-sheet)



* Product specification subject to change according to technology improvement.