


## FL-OSPUN-150 SERIES

### Application

Flood light is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centres, showrooms, display areas, residences, etc.

### Specification

<b>Input Voltage</b>	200-240 V AC
<b>Power Factor</b>	> 0.9
<b>IP Rating</b>	IP65
<b>Rendering Index</b>	> 70 (CRI80, CRI90 upon request)
<b>Lumen Per Watt</b>	157lm/w
<b>LED Operating Life</b>	>50, 000 Hrs
<b>Operating Temperature</b>	-30° to +45° C
<b>Colour Correlated Temperature</b>	3000K - 6500K
<b>Available Colour</b>	White/Silver/Black
<b>Dimmable</b>	Optional
<b>Driver</b>	Built-in

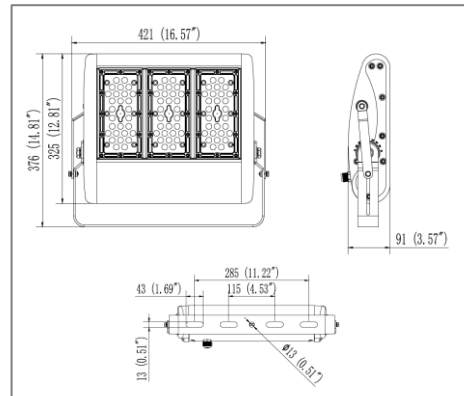

### Ordering Data

Part No.	Power	Lumen	Beam Angle
EVO-FL-OSPUN-150-1515-X	150W	23,550lm	15° x 15°
EVO-FL-OSPUN-150-3030-X			30° x 30°
EVO-FL-OSPUN-150-6060-X			60° x 60°
EVO-FL-OSPUN-150-9060-X			90° x 60°
EVO-FL-OSPUN-150-85135-X			85° x 135°

Remark: 'X' (CCT) = "30"(3000K) / "40"(4000K) / "50"(5000K) / "65"(6500K)  
 (More CCT preference available upon request)

\* Product specification subject to change according to technology improvement.