

BLRI SERIES


Application

Bollard Light is designed to use for outdoor, path, etc.

Specification

| | |
|--------------------------------------|--|
| Input Voltage | 200-240 V AC |
| Rendering Index | > 80 |
| Operating Temperature | 0 to 35 Degrees Celsius |
| LED Operating Life | 15, 000 Hrs |
| Colour Correlated Temperature | 2700K, 6500K |
| Available Colour | Matt Black & Matt Silver |
| Dimmable | Non Dimmable |
| Applications | Outdoor/Path |
| Housing | Body is Extruded From Aluminum Head is Die Cast From Aluminum Alloy |

Ordering Data

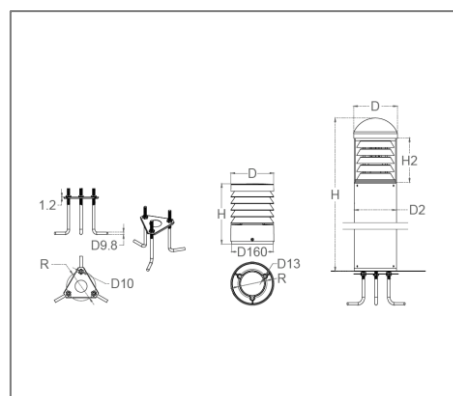

| Part No. | Head Shape | Base Type | Dimension | | | |
|--------------|------------|-----------|-------------|----|----|-----|
| | | | D x H | D2 | H2 | R |
| EVO-BLRI-R-4 | Round | E27 | 163.5 x 231 | - | - | 111 |