


## RCIN SERIES

### Application

Inground luminaire is designed to accent or highlight trees, walls, columns, signboards, etc.

### Specification


<b>Input Voltage</b>	24 V DC
<b>Power Factor</b>	0.9 Typical
<b>System Efficiency</b>	95%
<b>Rendering Index</b>	Min 90
<b>Operating Temperature</b>	-20 to 50 Degrees Celsius
<b>LED Operating Life</b>	30, 000 Hrs
<b>Dimmable</b>	Optional
<b>Material</b>	Tempered Glass Clear / Dot Frosted Diffuser Rim & Housing is Stainless Steel Alloy PVC mounting box
<b>IP Rating</b>	IP54

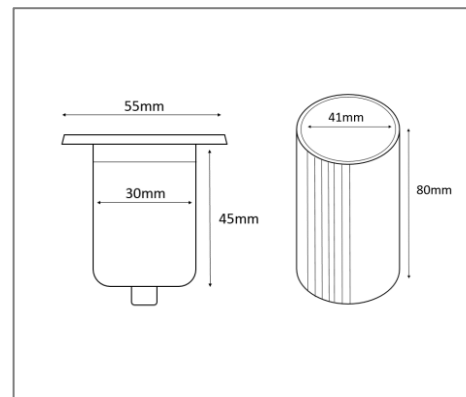

### Ordering Data

Part No.	Power	Lumens	CCT (K)	Beam Angle
EVO-RCIN-5-30-VL	5W	380lm	3000K	100°
EVO-RCIN-5-40-VL	5W	500lm	4000K	100°

Related Product : Applicable with digital catalogue only  
(Please click the product photo to redirect towards the respective cut-sheet)

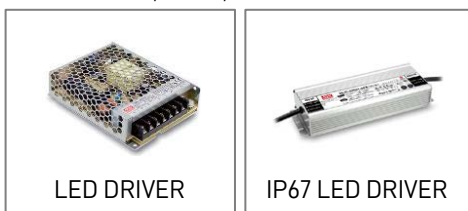

\* Product specification subject to change according to technology improvement.