



WL9701 SERIES

Application

LED Wall light is designed to use for office buildings, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

| | |
|------------------------------|---|
| Input Voltage | 200-240 V AC |
| Power Factor | 0.9 Typical |
| System Efficiency | 85% |
| Rendering Index | Min 80 |
| Operating Temperature | -20 to 45 Degrees Celsius |
| Housing | Die Cast Aluminium body Glass Diffuser |
| Colour | Matt Black |
| LED Operating Life | 30,000 Hrs |
| Beam Angle | 110° |

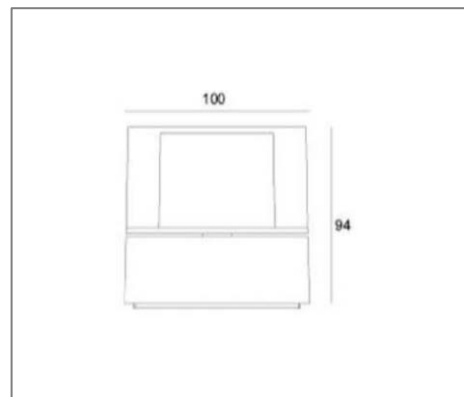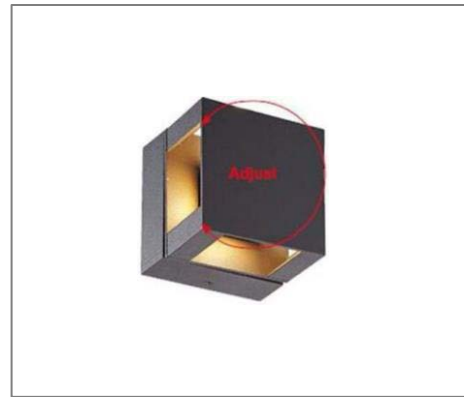

Ordering Data

| Part No. | Power | Lumens | CCT (K) | DIMENSION |
|-----------------|--------|-----------|---------|-------------------------|
| EVO-WL9701-3-30 | 3W x 4 | 270lm x 4 | 3000K | 100(L) x 100(W) x 94(H) |