



PNL-1203-36W SERIES

Application

LED panel light is designed to use for hotels, retail stores, factories, warehouses, restaurants, meeting rooms, museums, subways, healthcare facilities, living rooms, washrooms, corridors, and etc.

Specification

| | |
|------------------------------|--|
| Input Voltage | 200 ~ 240 V AC |
| Frequency | 50 Hz |
| Power Factor | > 0.9 |
| IP Rating | IP20 |
| CRI | > 80 |
| Beam Angle | 110° |
| Light Efficiency | 100 lm/W |
| Operating Temperature | -20°C ~ 40°C |
| Lifetime | > 50,000 hours |
| CCT | 3000K, 4000K, 6500K |
| Housing | Aluminium Housing & Polycarbonate Diffuser |
| Mounting Method | Recessed/ Suspended/ Surface Mounted |
| Dimmable | Optional |

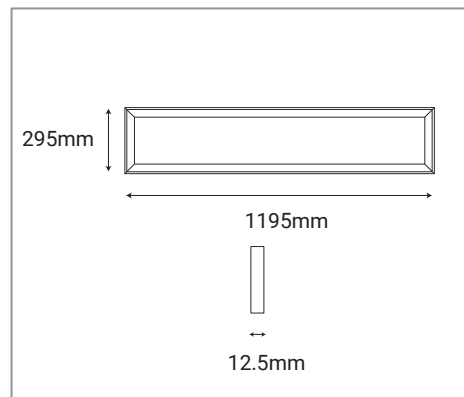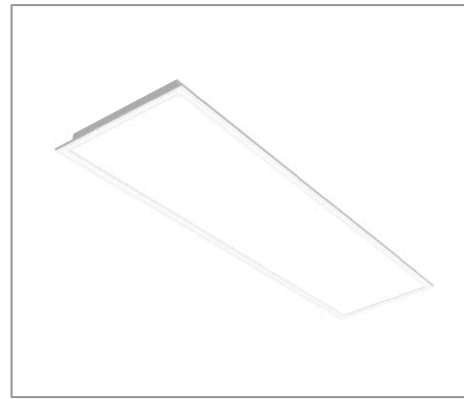

Ordering Data

| Part No. | Power (W) | Lumens (lm) | CCT | UGR | Length (L x W x H) |
|-------------------------|-----------|-------------|-------|------|---------------------|
| EVO-RC-PNL-1203-36W-830 | 36 | 4104 | 3000K | < 19 | 1195 x 295 x 12.5mm |
| EVO-RC-PNL-1203-36W-840 | 36 | 4320 | 4000K | < 19 | 1195 x 295 x 12.5mm |
| EVO-RC-PNL-1203-36W-865 | 36 | 4320 | 6500K | < 19 | 1195 x 295 x 12.5mm |

Accessories



200-240V Driver
(Included accessory)




Safety Cable
(Included accessory)




Driver Holder
(Optional accessory)



Recessed Spring Kit
(Optional accessory)



Surface Mounted Kit
(Optional accessory)



Gypsum Board Frame
(Optional accessory)

* Product specification subject to change according to technology improvement.